


Non-standard Threaded plugs



PLUGS WITH SEALANT/PRECOAT

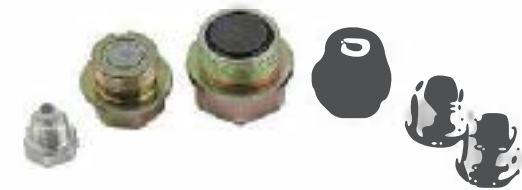

PLUGS WITH MAGNETS



SQUARE SOCKET PIPE PLUGS



SQUARE HEAD PIPE PLUGS



ALUMINIUM PLUGS



NPT NPTF THREAD PIPE PLUGS



OIL DRAIN PLUGS



BREAKTHROUGH PLUGS



RADIATOR PLUGS



MORE NONSTANDARD PLUGS

CUSTOM MADE

.....
We have 13 years' screw plug OEM experience. We manufacture more than 200 items of customized screw plugs for more than 100 customers. Pls not hesitate to send your drawing, if custom made screw plug needed. Good quality, good price and fast delivery will be ensured !
.....



DX

Jiaxing Dexun Co., Ltd
ISO 9001/ IATF16949



Jiaxing Dexun Co., LTD

Room801-802, Ruian Square, Hongxing Road,
NO. 2228, Xiuzhou District, Jiaxing, Zhejiang, China.
Telephone: 86-573-82716900

Fax: 86-573-82715881

E-mail: wendyd@dexun-hardware.cn

admin@dexun-hardware.cn

www.autoparts-dx.com

www.jxdexun.en.alibaba.com

We manufacture screw plugs,
standard & non-standard.

About US:

Dexun Group is an ISO9001 & IATF16949 certificated enterprise, providing standard and non-standard screw plug. Reliable quality, competitive price, fast delivery, various standards & full ranges ensure us to be reliable partner of customers all over the word !



Main Products:

Screw Plug with Magnet




Heinriches,Eaton,Parker-standards Screw Plug



ASME, SAE-USA Standard Screw Plug



SAE J531 Automotive Pipe, Filler, and Drain plug

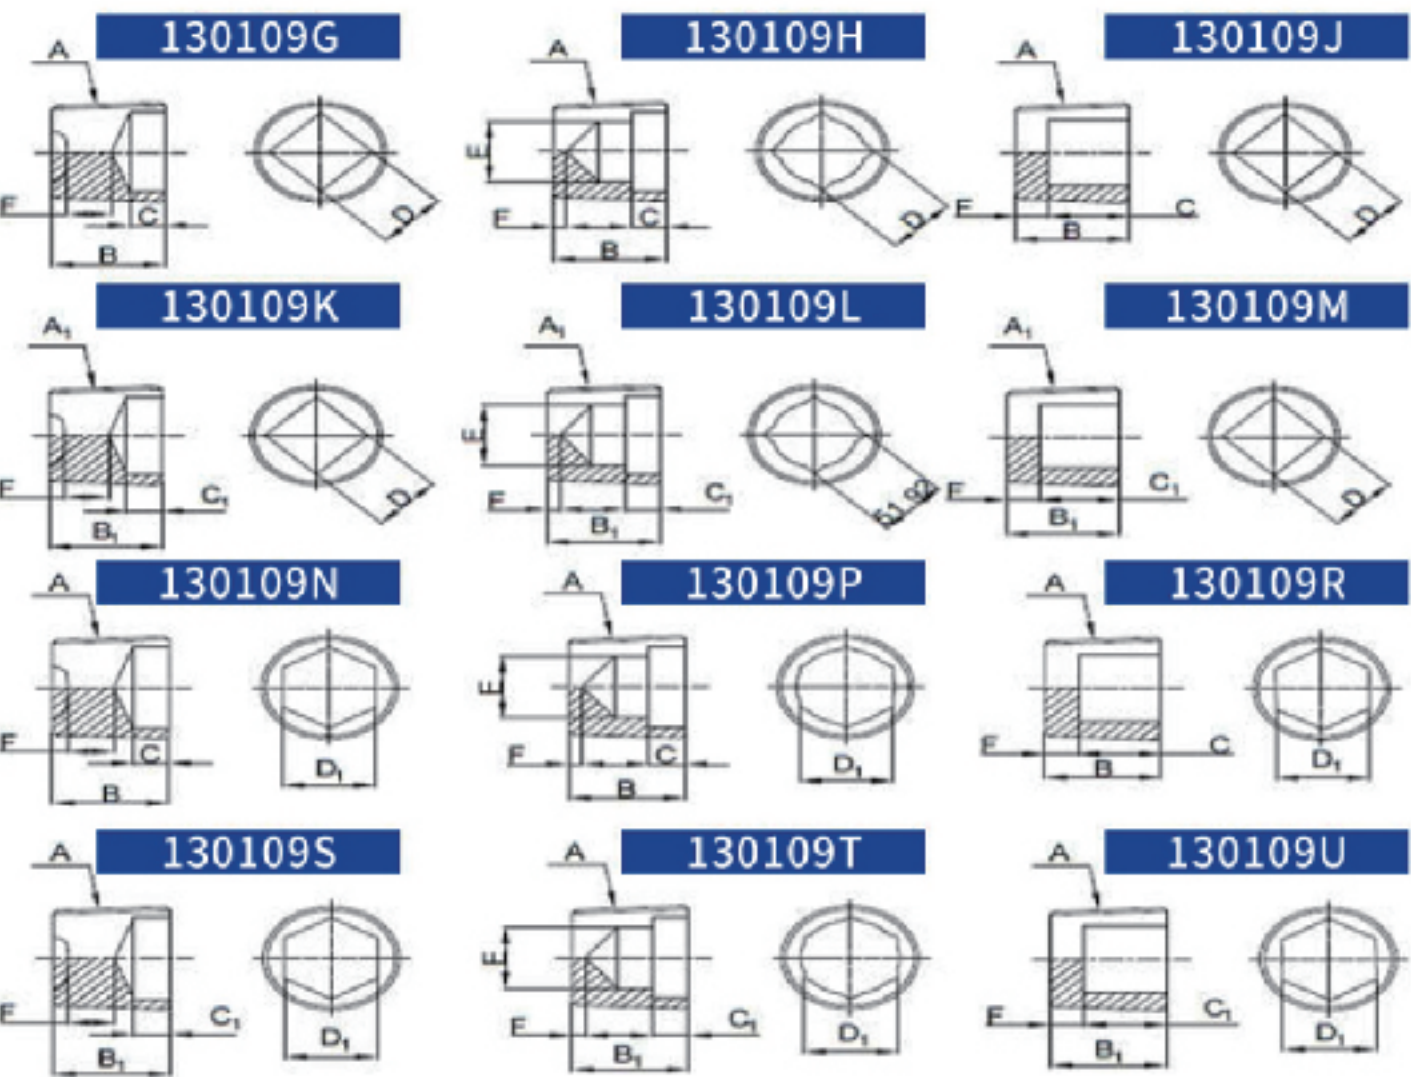

Size Specification:

A	A1	B	B1	C min	C1 min	D	D1
NPT F	PTF- SAE SHORT	Body length		Socket Depth		Socket Width	
						broached or Upset	Cast
in	in	mm	mm	mm	mm	mm	mm
1/16-27		7.62	6.61	3	2.3	3.37	3.45
1/8-27		7.62	6.86	3	2.3	4.94	5.05
1/4-18		11.68	10.42	4.8	4.1	6.54	6.85
3/8-18		11.68	10.42	4.8	4.1	8.17	8.50
1/2-14		15.50	13.72	6.4	4.8	9.77	10.05
3/4-14		15.75	13.97	7.9	4.8	12.97	13.35
1-11-1/2		19.56	17.53	9.7	6.4	12.97	13.35

DIN Standard Screw Plug



DIN 7604 Light-Duty Hexagon Head Screw Plugs




MATERIAL OPTIONS

1. Carbon steel, Alloy Steel
2. Stainless Steel
3. Brass

MAGNET OPTIONS

1. Ferrite
2. Lanthanum

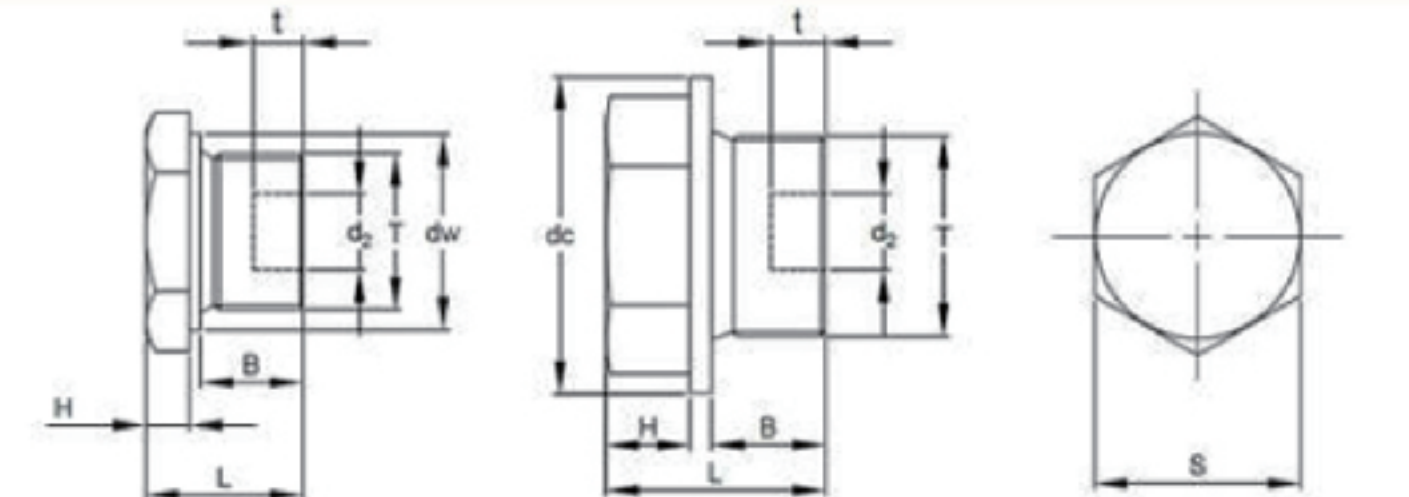

Size Specification:

Type of stud end	T	S	H	D	B	L	D ₂	t	Wt.
	mm	mm	mm	mm	mm	mm	mm	mm	g
A	M10X1	14	4	14	6	10.5	-	-	12.8
	M12X1,5	17	6	17	9	15.5	-	-	19.2
	M14X1,5	19	6	19	9	15.5	-	-	24.6
	M16X1,5	22	6	21	9	15.5	-	-	33.4
	M18X1,5	17	6	23	9	17	10	8	27.2
	M22X1,5	19	6	27	9	17	14	8	34.3
	M26X1,5	22	8	31	9	19.5	16	8	59.4
C	M30X1,5	22	8	36	9	19.5	20	8	69.5
	M8X1	12	4	12	8	12.5	-	-	6.5
	M10X1	14	4	14	8	12.5	-	-	9.6
	M22X1,5	19	6	27	12	20	14	8	42.5
	M26X1,5	22	8	31	12	22.5	16	10	68.5
	M30X1,5	22	8	36	12	22.5	20	10	81
	M38X1,5	22	8	44	12	23	26	10	118
	M45X1,5	24	8	52	12	23	32	10	163
	M52X1,5	27	8	60	12	23	38	10	205